


223 SERIES WIRE CONNECTOR


412-413-415




223-412



223-413



223-415

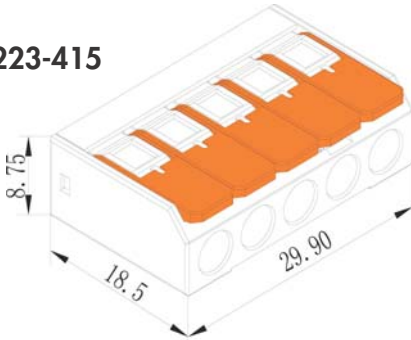

TECHNICAL DATA

ELECTRICAL

Current Intensity 32A

Measured Voltage 450V

Measured Shock Voltage 4KV

MATERIALS

Contacts Red Copper, Silvered

Housing PC Handle lever/PA66 FR52G30

MECHANICAL



Insulation Temperature 105 °C

Cross section(mm²) 0.08-4.00

Cross section(AWG) 24-12

Strip length(mm) 11

P(NO. of Poles) 2, 3, 5

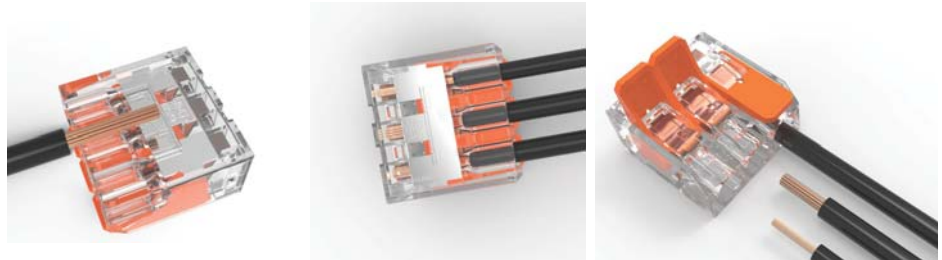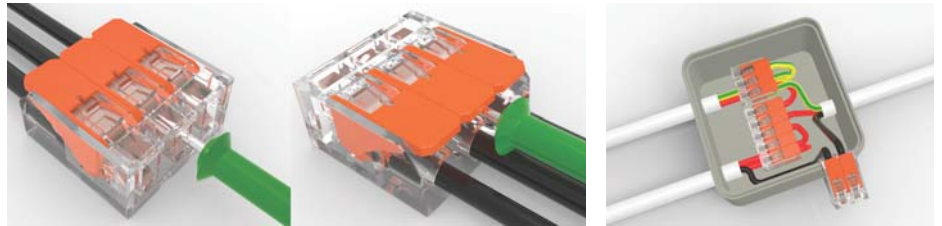

For this product, please contact:

ERANOVA ENDÜSTRİ
ve ELEKTRİK MALZEMELERİ LTD. ŞTİ.

Perpa Trade Center, B Block 11th Floor,
No: 1828, Okmeydanı, Şişli / İstanbul - Turkey
Tel. +90 (212) 265 02 93 - Fax +90 (212) 381 79 69
satis@eranova.com.tr

ERANOVA
Endüstri ve Elektrik Malzemeleri Ltd. Şti.
Dynamic Solutions Worldwide

www.eranova.com.tr

All information, recommendations and test data herein are offered only as a guide. We believe them to be accurate but do not guarantee results, freedom from patent infringement, suitability of this product for any resultant application.