




Terminal Block - DB125 125 AMPER

TECHNICAL DATA

Material	Abs, Copper
Rated Current (A)	125A
Rated Voltage	690V
Dimensions	30 x 47 x 74mm
Input	35 mm ² * 1 Piece / Bridge 16 mm ² * 1 Piece
Output	16 mm ² * 6 Piece
Copper Weight	118 gr.

FEATURES

- Glade of flame retardant: UL94V-0
- Rail or screw mounting
- Transparent cover and screen
- Minimum space for maximum power
- Safe connections

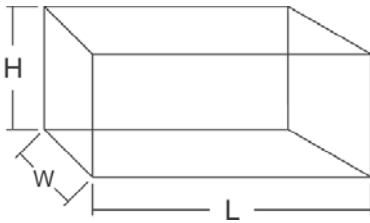

Quick Code	Product Code	Rated Current (A)	Input		Output		L	H	W
			Section	Piece	Section	Piece	mm		
41034	DB80	80 A	16 mm ²	1	6 mm ²	4	30	47	65
					16 mm ²	2			
41035	DB125	125 A	35 mm ²	1	16 mm ²	6	30	47	74
			Brige 16 mm ²	1					
41036	DB160	160 A	70 mm ²	1	16 mm ²	6	30	47	74
			Bridge 16 mm ²	1					
41037	DB250	250 A	120 mm ²	1	35 mm ²	2	49	50	95
					16 mm ²	5			
					10 mm ²	4			
41038	DB400	400 A	185 mm ²	1	35 mm ²	2	49	50	95
					16 mm ²	5			
					10 mm ²	4			
41039	DB500	500 A	Bara 3x15 - 8x24	1	35 mm ²	2	59	50	95
					16 mm ²	5			
					10 mm ²	4			

For this product, please contact:

ERANOVA ENDÜSTRİ
ve ELEKTRİK MALZEMELERİ LTD. ŞTİ.

Perpa Trade Center, B Block 11th Floor,
No: 1828, Okmeydanı, Şişli / İstanbul - Turkey
Tel. +90 (212) 265 02 93 - Fax +90 (212) 381 79 69
satis@eranova.com.tr

ERANOVA
Endüstri ve Elektrik Malzemeleri Ltd. Şti.
Dynamic Solutions Worldwide

www.eranova.com.tr

All information, recommendations and test data herein are offered only as a guide. We believe them to be accurate but do not guarantee results, freedom from patent infringement, suitability of this product for any resultant application.